

200 series

rotary machines for filling and closing pre-formed containers





200 Series - a flexible choice

Unique offer

The 200 Series is available in four frame sizes with various numbers of lanes. The choice of a model and number of lanes depends on three key factors:

- required output;
- size and type of packaging;
- requirements for additional equipment.

The 200 Series can achieve outputs from 2,400 up to 14,000 cups/hour across a large range of product types. Even the most complex projects and the most sophisticated ideas are feasible with the 200 Series machines.

Flexibility

The flexibility of the 200 Series with its quick and simple changeover procedures allow for using both traditional as well as new and innovative packaging designs. Reliability of these machines enables highly efficient production. The 200 Series provides a number of solutions within the following fields:

- dosing of different product types,
- quick change-over to alternative packaging,
- different methods of container closing.

All the features of the 200 Series make these machines ideal for development of new product concepts in different market areas.

Hygiene of the packaging process

The 200 Series machines meet stringent hygiene standards which are common within the different fields of the food industry. The robust construction materials used in the 200 Series guarantee a long machine life in severe operating production environments. Hygienic standards can be enhanced by using additional solutions, for example air filtration of the product area and decontamination of packaging. The availability of our hygienic options depend on the number of lanes, cup size and machine configuration.

Quality and safety at the highest level

The design and construction of the 200 Series machines guarantee safety at all three basic levels: operator's safety, machine's protection and product/packaging material savings. All the required international and local safety standards are fulfilled, including CE.

Ease of operation and maintenance

The 200 Series have recipe screen functionality. Trepko has designed a control system which provides simple and quick access to recipes assigned to a given product and container volume.

After Sale Service

- training for operators and maintenance engineers,
- professional and easily accessible service,
- fast and efficient delivery of spare parts designed and produced by Trepko or components from trusted and reliable suppliers.

Integration with End of Line Solutions (700 Series)

Trepko offers a comprehensive range of End of Line solutions which can be integrated with the 200 Series.




210 MODEL











SPECIFICATIONS

•	Nullibei	Of faffes	

1-4

- Number of lanes and maximum output (for a Ø 95 mm cup)
- 2 lanes, 4.800 cups/h

• Power supply / Compressed air pressure

 $3 \times 400 \text{ V} + \text{PE} + \text{N} / 6 \text{ bar}$

• Machine dimensions (L/W/H)

2700 / 1450 / 1650 mm

220 MODEL











SPECIFICATIONS

- Number of lanes
 - S

• Number of lanes and maximum output (for a \varnothing 95 mm cup)

- Power supply / Compressed air pressure
- Machine dimensions (L / W / H)

1-4

3 lanes, 7.200 cups/h

 $3 \times 400 \text{ V} + \text{PE} + \text{N} / 6 \text{ bar}$

3000 / 1700 / 1900 mm

230 MODEL











SPECIFICATIONS

Number of lanes

- 1-6
- Number of lanes and maximum output (for a Ø95 mm cup)
- 4 lanes, 9.600 cups/h

Power supply / Compressed air pressure

3 × 400 V + PE + N / 6 bar 3000 / 1960 / 2050 mm


• Machine dimensions (L / W / H)

240 MODEL







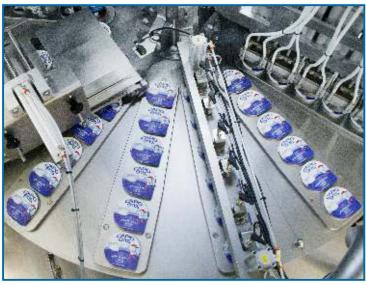



SPECIFICATIONS

- Number of lanes
 - iber of lanes

• Number of lanes and maximum output (for a Ø 95 mm cup)

- Power supply / Compressed air pressure
- Machine dimensions (L / W / H)

- 1-6
- 6 lanes, 14.400 cups/h
- $3 \times 400 \text{ V} + \text{PE} + \text{N} / 6 \text{ bar}$
- 3300 / 2353 / 2474 mm

Options*

	210 model	220 model	230 model	240 model
HYGIENE OPTIONS				
Laminar flow cabins	•	•	•	•
CIP/SIP of dosers	•	•	•	•
UV radiation of cups	•	•	•	•
UV radiation of lids	•	•	•	•
Chemical sterilisation			•	•
Gas flush	•	•	•	•
EFFICIENCY OPTIONS				
Cup/lid stack feeding magazines		•	•	•
Foil-sledge	•	•	•	•
CLOSING OPTIONS				
Heat-sealed die-cut foil	•	•	•	•
Foil from reel		•	•	•
Snap-on lids	•	•	•	•
Seal control		•	•	•
DOSING & PRODUCT IN-FE	ED			
Pre or post-dosing	•	•	•	•
Dry filling	•	•	•	•
Compensator	•	•	•	•
Scroll chute	•	•	•	•
Multihead weighers	•	•	•	•
Swirl during filling	•	•	•	•
OTHER OPTIONS				
Date marking systems	•	•	•	•
Telephone modem	•	•	•	•

^(*) subject to number of lanes, cup size and the machine's configuration

END OF LINE SOLUTIONS - 700 SERIES













Scandinavia

Trepko A/S Energivej 30 2750 Ballerup Denmark Phone: +45 43 99 22 44 E-mail: trepko@trepko.dk

Central & Eastern Europe

Trepko S.A. ul. Roosevelta 116 62-200 Gniezno Poland Phone + 48 61 426 50 41 E-mail: info@trepko.pl

Aseptic Machines

Trepko S.A. branch Świerklany 44-266 Świerklany ul. Przemysłowa I Poland Phone +48 32 4302476 E-mail: info@trepko.pl

Brazil

Trepko do Brasil Ltda Rua Brasholanda, 240 Pinhais, Paraná Zip code 83322-070 BRAZIL Phone +55 41 3513-5100 E-mail: vendas@trepko.com.br

DACH

Trepko A/S Regional Office Hinterbacher Str I. D-87439 Kempten/ Germany Phone: +49 831 527 123 58 Mobile.: +49 151 434 099 30 E-mail: tesma@trepko.com



Great Britain, Ireland, Australia and New Zealand

Trepko UK Limited Marshall Way Heapham Road Ind. Estate Gainsborough, Lincolnshire Great Britain, DN21 IGD Phone +44 1427 612244 E-mal: info@trepko.co.uk

Latin & North Africa

Trepko Inc. 5903 Johns Rd. Tampa, FL, 33634 USA Phone +1 813 443 0794 E-mail: salesusa@trepko.com

Sub-Saharan Africa

Trepko / Filmatic 130 Jan van Riebeek Drive Paarl, Western Cape, 7646 SOUTH AFRICA Phone +27 (0) 21 862 2192 E-mail: sales@filmatic.com

Middle East, North Africa

Trepko A/S
Regional Office
Andrew Kamel
Area Sales Director
KAIR – EGYPT
Phone +20 100 015 1378
E-mail: afk@trepko.dk



info@trepko.com www.trepko.com